

**NINGBO YONGWEI
TECHNOLOGICAL INC COMPANY**

Add: NO. 266-268 Hongtang Middle Road, Ningbo, China

Tel: 86-574-87588036

Fax: 86-574-87563992

P.C: 315033

E-mail: yongwei@maxvolt.com.cn yongwei@globalsources.com

Website: www.maxvolt.com.cn www.globalsources.com/yongwei.co



NINGBO YONGWEI
TECHNOLOGICAL INC COMPANY

BRIEF INTRODUCTION

Ningbo Yongwei Technological Inc. Company is a National High-tech Enterprise specialized in the production of various batteries, which is the main developing products of the tenth National Five-year Project and rated in the List of Chinese New High-tech Export Products.

At present, The company produces and sells series of alkaline, zinc manganese, rechargeable battery and button cell, flashlight and spirit level, etc. The annual output exceeds 350 million pieces, 75% of the products are exported to more than 50 countries such as Europe, America, Southeast Asia, etc, enjoying high popularity among domestic and overseas customers.

Guiding under the management concept of "Best Manpower, Breakthrough Technology", our company attracts a lot of senior technicians to continuously introduce and develop advanced battery techniques and new products. Yongwei, the first one past UL in China battery area, is in strictly compliance with ISO9001 and ISO14001 in management.

Insisting on the service ideal of "Quality First, Customers Supreme", Ningbo Yongwei Technological Inc. Company has strengthened international cooperation and made a great success in technology development. The company is devoting itself to be the first-class production base of battery by technological and managerial innovation, which is designed to service every customer well.



8 Other PRODUCTS



Ni-MH Rechargeable Flashlight

Strong Light Range 300M




Laser Level



Charger

7 Packing Variety
BATTERY


NINGBO YONGWEI TECHNOLOGICAL INC COMPANY

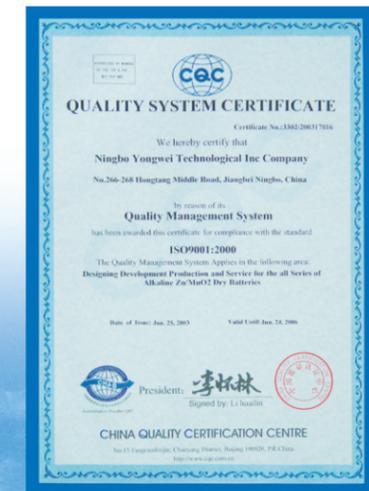

1 Alkaline BATTERY



6 Button & photo BATTERY

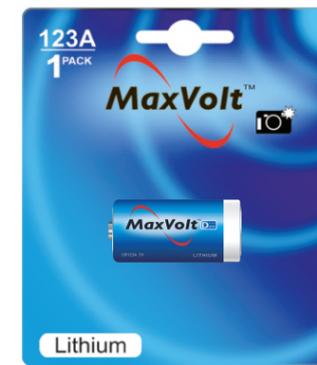

LR03 LR6 LR14 LR20 6LR61 23A 27A 3LR12 4LR25

BUTTON CELL: AG0-AG13 CR1220 CR1616 CR2016 CR2025 CR2032

PHOTO BATTERY: CR2 CR123A 2CR5 CR-P2

Item	Diameter(mm)	Height(mm)	Nominal Voltage(V)	Test Condition	Duration
LR03	9.5-10.5	43.3-44.5	1.5	10Ω, 24h/d, 0.9V 3.6Ω, 15s/m, 24h/d, 0.9V	8h 610cycles
LR6	13.5-14.5	49.2-50.5	1.5	10Ω, 24h/d, 0.9V 1.8Ω, 15s/m, 24h/d, 0.9V	19.1h 610cycles
LR14	24.9-26.2	48.6-50.0	1.5	3.9Ω, 24h/d, 0.8V 6.8Ω, 1h/d, 0.9V	20h 39h
LR20	32.3-34.2	59.5-61.5	1.5	2.2Ω, 24h/d, 0.8V 3.9Ω, 1h/d, 0.9V	19h 42h
6LR61	26.5X17.5X48.5(+0-2)		9	180Ω, 24h/d, 4.8V 270Ω, 1h/d, 5.4V	800min 1150min
LR1	10.9-12.0	29.1-30.2	1.5	20Ω, 24h/d, 0.9V 300Ω, 12h/d, 0.9V	12.8h 212h
23A	9.9-10.2	28.1-28.7	12	20KΩ, 24h/d, 7.2V	98h
27A	7.65-7.85	27.7-28.3	12	20KΩ, 24h/d, 7.2V	36h
3LR12	60-62X20-22X63-67		4.5	20Ω, 24h/d, 2.7V 220Ω, 4h/d, 2.7V	22h 350h
4LR25	65-67X65-67X108-115		6	8.2Ω, 30min/d, 3.6V 110Ω, 12h/d, 3.6V	29h 515h

Item	Nominal Voltage(V)	Nominal Capacity(mAh)	Dimension ΦXH(mm)	Packing	Box(PCS)	Carton(PCS)	G.W(KG)	Volume(CBM)
AG3 L736 LR41	1.5	34	7.9X3.6	10pcs/card	200	3600	4.5	0.02
AG10 L1131 LR54	1.5	72	11.6X3.1				6.0	
AG13 L1154 LR44	1.5	145	11.6X5.4				9.0	
CR1220	3	40	12.5X2.0	5pcs/card	100	1800	4.5	0.0172
CR1616	3	50	16X1.6				5.2	
CR2016	3	75	20X1.6				6.3	
CR2025	3	150	20X2.5				7.5	
CR2032	3	210	20X3.2				8.5	
CR123A	3	1300	16.0-17.0X33.5-34.5	1pc/card	10	200	6	0.0245
CR-2	3	750	15.0-16.0X26.0-27.0				5	0.0245
CR-P2	6	1300	32.5-35X18.5-19.5X34.5-36.0				10	0.0266
2CR5	6	1300	32.5-34X16.0-17.0X43.0-45.0				10	0.0266






5 Rechargeable BATTERY

2 Alkaline BATTERY



AA AA AAA C D 9V

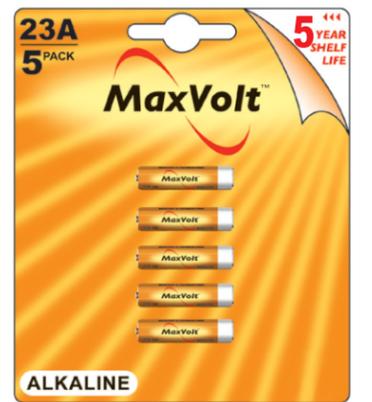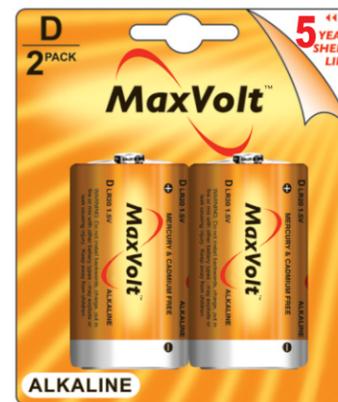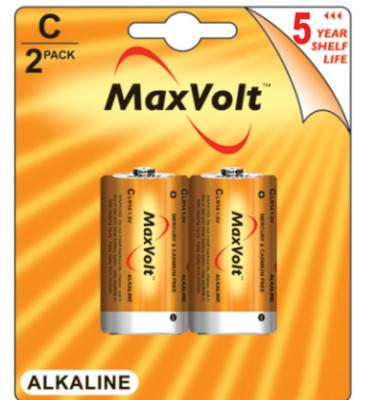

Item	Nominal Voltage(V)	Diameter(mm)	Height(mm)	Capacity(mAh)	Packing	Box(PCS)	Carton(PCS)	G.W.(KG)	Volume(CBM)
AAA	1.2	9.5-10.5	43.3-44.5	600	4pcs/card	48	864	13	0.0222
				700	4pcs/card	48	864	15	0.0222
AA	1.2	13.5-14.5	49.2-50.5	1100	4pcs/card	48	864	24	0.0285
				1500	4pcs/card	48	864	25.5	0.0285
				1800	4pcs/card	48	864	27	0.0285
				2000	4pcs/card	48	864	28	0.0285
C	1.2	24.9-26.2	48.6-50.0	2500	2pcs/card	24	96	8.5	0.0127
				4500	2pcs/card	24	96	10	0.0127
D	1.2	32.3-34.2	59.5-61.5	2500	2pcs/card	24	96	12	0.0185
				8000	2pcs/card	24	96	17	0.0185
9V	8.4	26.5X17.5X48.5		170	1pc/card	12	144	8	0.0244

Item	Packing	Box(PCS)	Carton(PCS)	N.W.(KG)	Volume(CBM)
LR03	4pcs/shrink	40	1200	15	0.0086
LR03	4pcs/card	48	864	11	0.0222
LR6	4pcs/shrink	40	960	23.5	0.0096
LR6	4pcs/card	48	864	21.5	0.0285
LR14	2pcs/shrink	12	288	21	0.0113
LR14	2pcs/card	24	144	11	0.0183
LR20	2pcs/shrink	12	144	21.5	0.0119
LR20	2pcs/card	24	144	21.5	0.025
6LR61	1pc/shrink	12	288	15	0.0074
6LR61	1pc/card	12	144	8	0.0244
LR1	5pcs/card	100	1800	17.5	0.03
23A	5pcs/card	100	1800	18	0.027
27A	5pcs/card	100	1800	12	0.0268
3LR12	1pc/shrink	12	144	27	0.017
3LR12	1pc/card	24	96	12	0.0232
4LR25	1pc/shrink	4	24	23	0.0175



3 Super Heavy Duty BATTERY



R03P R6P R14P R20P 6F22 3R12 4R25

Item	Diameter(mm)	Height(mm)	Normal Voltage(V)	Test Condition	Duration
R03P	9.5-10.5	43.3-44.5	1.5	3.9Ω, 24h/d, 0.9V 10Ω, 1h/d, 0.9V	35min 168min
R6P	13.5-14.5	49.2-50.5	1.5	3.9Ω, 24h/d, 0.9V 3.9Ω, 1h/d, 0.8V	105min 156min
R14P	24.9-26.2	48.6-50.0	1.5	3.9Ω, 24h/d, 0.9V 6.8Ω, 1h/d, 0.9V	280min 696min
R20P	32.3-34.2	59.5-61.5	1.5	3.9Ω, 24h/d, 0.9V 3.9Ω, 1h/d, 0.9V	750min 955min
6F22	26.5X17.5X48.5(+0-2)		9	180Ω, 24h/d, 4.8V 270Ω, 1h/d, 5.4V	220min 12.5h
3R12	60-62X20-22X63-67		4.5	20Ω, 24h/d, 2.7V 220Ω, 4h/d, 2.7V	325min 96h
4R25	65-67X65-67X108-115		6	8.2Ω, 30min/d, 3.6V 110Ω, 12h/d, 3.6V	650min 200h
4R25-2	132.5-136.5X69-73X127		6	8.2Ω, 30min/d, 3.6V 110Ω, 12h/d, 3.6V	1150min 240h

4 Super Heavy Duty BATTERY



Item	Packing	Box(PCS)	Carton(PCS)	N.W.(KG)	Volume(CBM)
R03P	4pcs/shrink	40	1200	10	0.0086
R03P	4pcs/card	48	864	7.5	0.0222
R6P	4pcs/shrink	40	960	16	0.0096
R6P	4pcs/card	48	864	14.5	0.0285
R14P	2pcs/shrink	24	384	18	0.0174
R14P	2pcs/card	24	288	14	0.034
R20P	2pcs/shrink	24	192	18	0.02
R20P	2pcs/card	24	144	14	0.025
6F22	1pc/shrink	12	288	11.5	0.0074
6F22	1pc/card	12	144	7	0.0244
3R12	1pc/shrink	12	144	16	0.017
3R12	1pc/card	24	144	19	0.0288
4R25	1pc/shrink	4	24	14	0.0175

